



H2000

Standing flowerbed

Specifications

(mm)



! Beware of imitations!

It is impossible to copy quality and safety. Only products branded with Terra's sign can provide the highest quality, safety and accuracy of execution.

Product protected by patent

✓ P 379058

Registered design

✓ Wp 9324-25

Made in EU

Warranty 24 months

Number of rings	9	Weight before planting	124 kg
Capacity	1168 liters	Weight after planting	600 - 1150 kg
Total height	1990 mm	Estimated amount of seedlings	110 - 130 pieces
Base diameter	1200 mm	Warranty	24 months

Weight depending on the type of soil and its moisture

Terra's Cascading Flower Towers include a 2-year warranty program called "DOOR TO DOOR". In practice it is an extensive system of support and technical assistance, as well as an extremely efficient service guarantee. Product's flaws will promptly be fixed by our service team in any place designated or new products will be delivered.

Colours (DUPLEX)



DUPLEX System

The combination of the zinc coating and a layer of structural polyester powder paint guarantee a resistant protection surface, which durability can be defined as a doubled product of the sum of these two coatings.

Production method

- laser-cut rings
- rings welded in MAG / TIG technology
- all the elements are hot dip zinc coated
- powder coated rings (DUPLEX system)

Safety

- rubber gasket on each rings
- no sharp edges
- heavy and stable
- high resistance to vandalism
- can be fixed to the ground




H2000


Standing flowerbed

Transport
(mm)

A side view

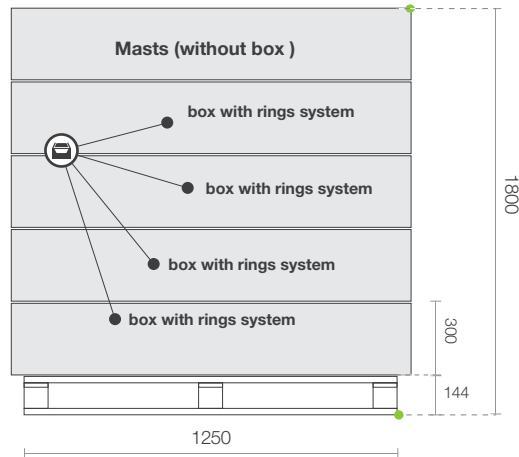

B side view

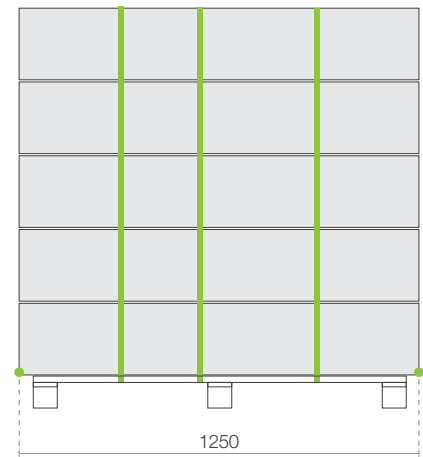

 SET PACKED IN A BOX


UP TO **4** SETS FOR A EURO PALLET

Set content

Lower pan with legs	1 item	Mast (profile 50x50 mm)	1 item
Rings	8 items	Mast (profile 60x60 mm)	1 item
Screw 10x50	18 items	Upper span	4 items
Screw 10x90	8 items	Lower span	4 items
Gasket	30 m	Protective flat bar	2 items

Additional accessories

 anti-theft system




A



side view

B




upper view

 watering system

TerraClick Tif

sprinkles
around the ring

water

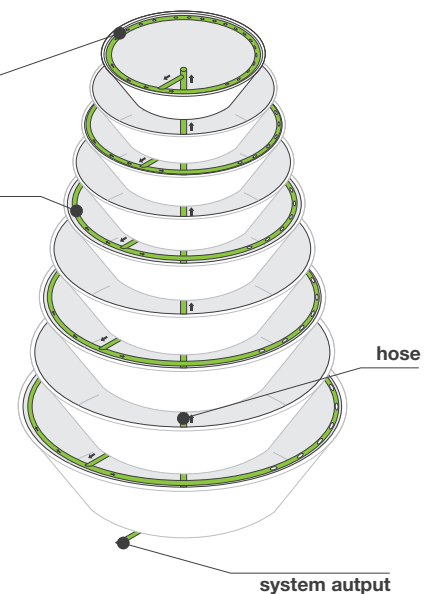

number of lines in the system: 5

type of connector: GEKA

flow of drippers: 2 - 3 l/h

pressure: 0,5 - 4 atm

opening pressure of the anti-drip: 0,4 atm

closing pressure of the anti-drip: 0,2 atm

hose type: **new generation**
resistant to chemicals
and acidification

