


#324

Obstruct

Obstruct concrete plinths frame streets, squares, and temporary events where there is a need to create security without disfiguring the cityscape. An organic concrete plinth with three contiguous islands, non-directional and set up in formations creates smaller spaces or paths between the products

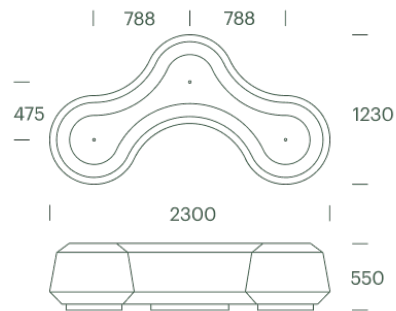

#324

Obstruct

Technical data

Materials

Molded white/black/grey poured, armoured concrete. Highly durable and weather-resistant.

Concrete is a dynamic material. Minor shrinkage cracks may occur over time.

Dimensions

2300 x 1230 x 550mm. Seating height 550mm.

Mounting

Positions directly on the ground. Hollows in the bottom for forklifts and 3 x M16 threads in the top for 3-point lifting. Weight of 1.5 ton eliminates need for mounting. Obstruct can be stacked for transportation.

Maintenance

Maintenance free. We recommend anti-graffiti coating to ensure easy removal of dirt and tags.

Variants

Available in white, grey or black concrete – or dyed to client specifications. Extra units may be mounted in the 3 x M16 threads in the top of each unit.

Accessories

3 x M16 steel eyebolts – stainless or painted red.

Design protection

Registered EUIPO, design number 004724045-0001.

Product code

324 0150 Obstruct hvid / 1,5 ton.

900 L110 Steel eyebolt M16, red powder painted.

900 L111 Steel eyebolt M16, stainless steel.

900 L112 Steel eyebolt M16, hot galvanized.

Standard farver (Approx. RAL)



White (standard color)
RAL 9003



Grey (variant color)
RAL 7004



Antracite (variant color)
RAL 7016